
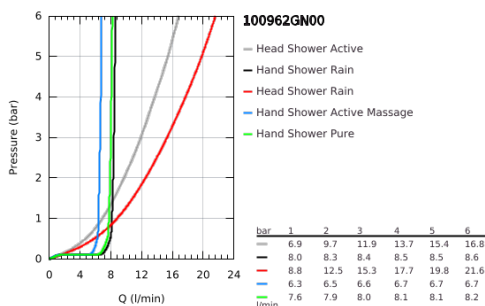


## 10 096 2GN 00 RAINSHOWER AQUA PURE SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING

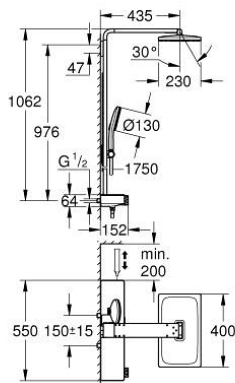

### PRODUKTA APRAKSTS (1/2)

- Krāsa: brushed cool sunrise
- consisting of:
  - horizontal 435 mm shower arm
  - exposed SmartControl thermostat with metal housing
  - allows change between:
    - head shower Rainshower Aqua Duo square 400 x 230 mm, black acrylic spray plate
    - swing angle 0° - 30°
  - 2 spray patterns:
    - GROHE PureRain, ActiveRain
  - hand shower Rainshower Aqua 130 (101 676), black acrylic spray plate
  - 3 spray patterns:
    - GROHE Rain, Rain+ and ActiveMassage
  - adjustable in height with gliding element
  - initial Rainshower Aqua Pure unit (101 672 9990) enclosed
  - shower hose 1750 mm
  - GROHE Rainshower Aqua Pure removes chlorine and odor (hand shower)
  - GROHE SmartTip showering spray selection via push of a ring
  - GROHE Water Saving - Less water, perfect flow
  - maximum flow rate (at 3 bar): 15 l/min
  - GROHE SmartControl with recessed metal buttons, push for ON-OFF, turn for volume adjustment from GROHE Water Saving to full flow
  - GROHE ProGrip Metal with knurl structure
  - GROHE TurboStat compact cartridge with wax thermoelement
  - GROHE SafeStop at 38°C
  - GROHE SafeStop Plus optional temperature limiter at 43°C included
  - integrated GROHE EasyReach shower tray (black glass)
  - GROHE DreamSpray perfect spray pattern
  - GROHE Long-Life finish
  - SpeedClean anti-lime system
  - Inner WaterGuide for a longer life
  - TwistStop to prevent hose from twisting
  - GROHE CoolTouch prevents scalding on hot surfaces

## 10 096 2GN 00 **RAINSHOWER AQUA PURE SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING**

### **PRODUKTA APRAKSTS (2/2)**

- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min.
- min. recommended pressure 1.0 bar
- internal 6 V lithium battery (42 886 000) type CR-P2
- battery lifetime approx. 10 years
- replacement filter: Rainshower Aqua Pure unit (101 672 9990)
- optional: Rainshower Aqua glass shelf (101 677)
- to change the filter, a minimum distance of 20 cm from the right-hand side wall must be maintained